

RELIANT
BRAND


Butterfly Valve

CENTRIC, PTFE SEATED
Lever, Gear, Pneumatic, Electric Operated

PRESSURE RATING
1 1/2" - 24" : 150 psig



Features and Benefits

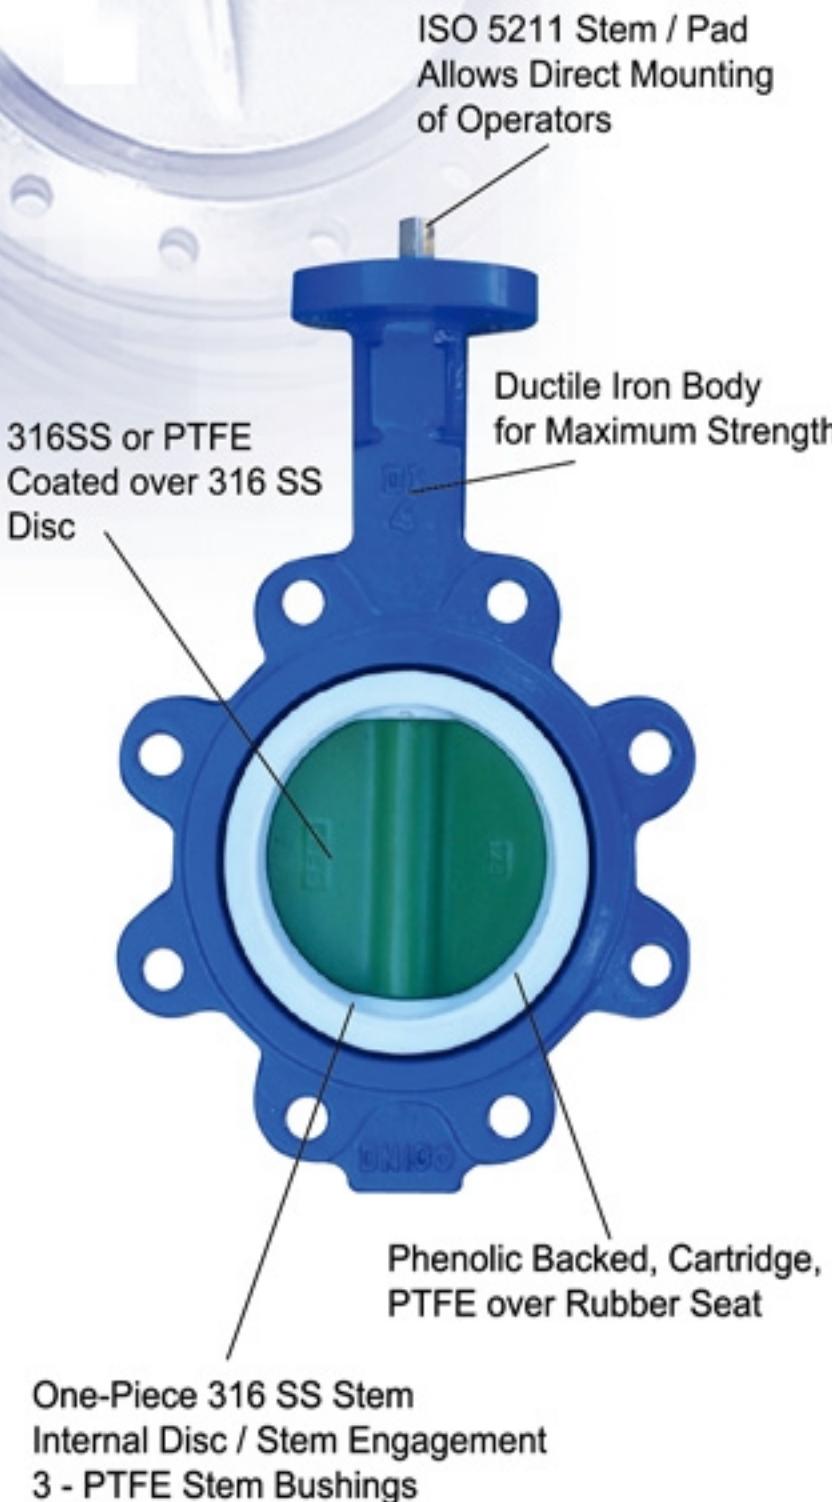

TOP WORK:

Absolute positive stem retention using corrosion resistant plate, retained by two screws fastened to the body. Bolt pattern is ISO5211 Stem is ISO5211



Stem:

Top of the 1-piece 316SS stem is the short square pattern that fits the Value Valve RPB pneumatic and the EOM electric actuator or any ISO5211 "drive by diagonal square head" actuator. Top is also grooved to fit above retaining plate.



Bottom of the 1-piece 316SS stem is double D drive, internal to the disc, eliminating the use of external fasteners. Close tolerance minimizes disc play while allowing easy removal of the disc and / or stem when necessary.



FEATURES

Disc:

Available in 316SS or .3mm PTFE coated 316SS
Internal DD drive is standard



Seat:

Cartridge type seat for high cycles and full vacuum is PTFE over Rubber .
Triple O-rings molded into seat ensures zero stem leakage. Large flat areas top and bottom maintains the disc to seat seal.

Bushings:

3-PTFE over fiberglass bushings keep the stem in perfect alignment with the seat and eliminates movement under pressure.



Automation:

Made easy by the ISO5211 top works, the VF Series PTFE valve is easily direct mounted to Value Valve's RPB series Pneumatic or EOM electric actuators.

Design Detail and Specifications

Face to Face: Valve body is designed to meet ISO 5752 table 5 short

Top Works: ISO 5211 PCD bolt pattern and drive stem

Flange Requirements: ANSI 125/150, BS Table E, JIS, 10K, DIN PN10

Pressure Rating: Maximum Bi - Directional bubble tight shutoff

150 psig

Seat tested to 110% full rating

Shell tested to 150% full rating

Body / Coating: 2 coats - epoxy resin

ASTM #A-536-65-45-12

Stem / Connection: 1 - piece 316SS stem, internal disc drive,

double "D" connection

ASTM # 182 F316

Disc: Spherically Machined 316SS, with optional 2 coats sprayed on PTFE to

.3 mm thickness

ASTM # A351 CF8M


Stem Retention: Retainer plate fitted into stem slot and bolted to the body

Stem Bushings: PTFE over fiberglass bushing located at bottom, immediately above the disc, and at top of stem, pressed into the body. Top bushing is split with viton o-ring between the two halves

Seat Design: Phenolic backed PTFE over rubber, cartridge seat

Triple o-rings molded into top and bottom of seat

VF730 PTFE Dimensions

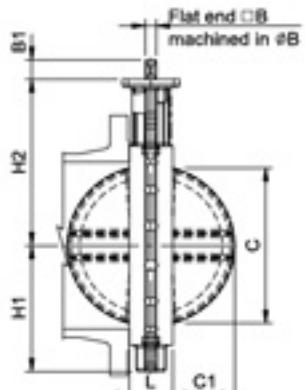

Size 1 1/2" to 14"



Size 1 1/2" to 2 1/2"




Size 3"




Size 4" to 6"



Size 8" to 14"

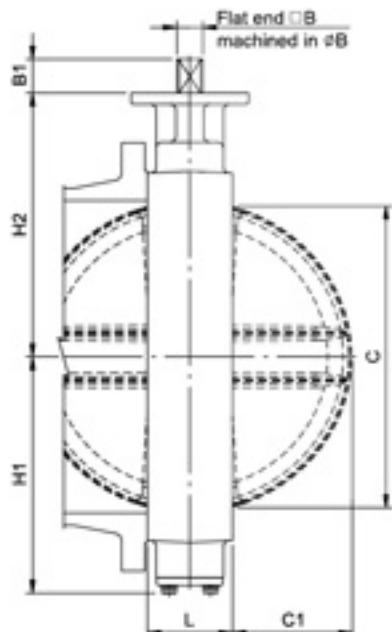


Size 16" to 24"

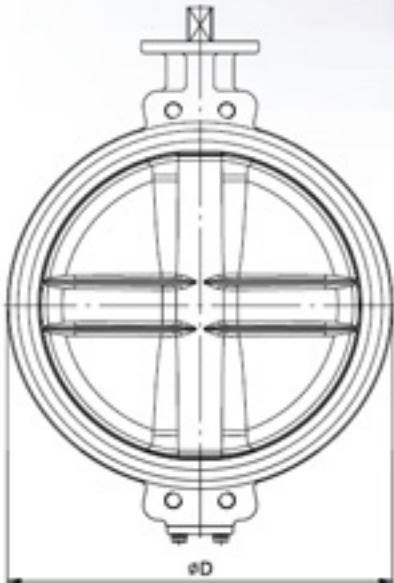

Size		Face to Face L				Mounting flange (ISO 5211)		Flat shaft end			Disc clearance		Weight lbs
mm	inch		H1	H2	D	Type	PCD	□ B	B1	□ B	C	C1	
40	1 1/2	1.30	2.36	4.72	3.19	F07	2.76	0.43	0.75	0.55	1.34	0.28	4.4
50	2	1.69	2.56	5.63	3.78	F07	2.76	0.43	0.75	0.55	1.54	0.31	6.6
65	2 1/2	1.81	2.80	6.10	4.33	F07	2.76	0.43	0.75	0.55	2.17	0.51	8.4
80	3	1.81	3.03	6.38	4.88	F07	2.76	0.43	0.75	0.55	2.72	0.75	8.8
100	4	2.05	4.21	7.13	5.83	F07	2.76	0.43	0.75	0.55	3.58	1.06	11.7
125	5	2.20	4.80	7.76	7.09	F07	2.76	0.55	0.75	0.75	4.53	1.42	16.7
150	6	2.20	5.51	8.27	8.11	F07	2.76	0.55	0.75	0.75	5.51	1.85	18.1
200	8	2.36	6.50	9.45	10.20	F10	4.02	0.67	0.94	0.87	7.32	2.68	29.8
250	10	2.68	7.91	11.26	12.60	F10	4.02	0.75	0.94	0.98	9.41	3.54	46.7
300	12	3.07	9.21	12.17	14.57	F10	4.02	0.87	0.94	1.18	11.34	4.37	71.6
350	14	3.07	11.87	12.95	16.22	F12	4.92	1.06	1.14	1.38	12.80	5.04	105.8
400	16	4.02	13.13	14.21	18.70	F12	4.92	1.26	1.14	1.65	14.76	5.63	132.3
450	18	4.49	14.11	15.47	20.87	F14	5.51	1.26	1.50	1.77	16.65	6.38	176.4
500	20	5.00	15.45	16.81	23.03	F14	5.51	1.42	1.50	1.97	18.62	7.17	275.6
600	24	6.06	17.89	19.37	27.05	F16	6.50	1.81	1.89	2.36	22.05	8.43	440.9

VF733 PTFE Dimensions

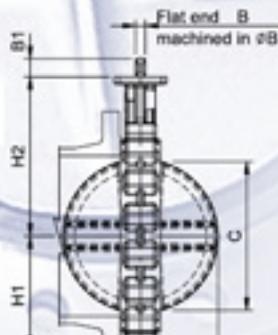


Size 1 1/2" to 14"




Size 1 1/2" to 3"




Size 4" to 8"

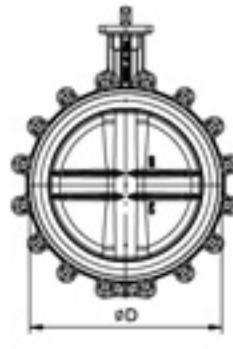

Size 8" to 14"

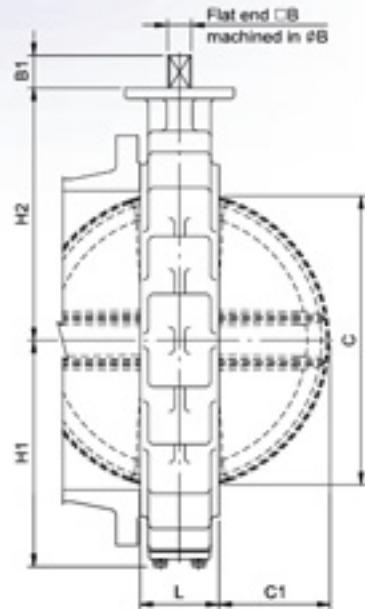

Size 16" to 24"

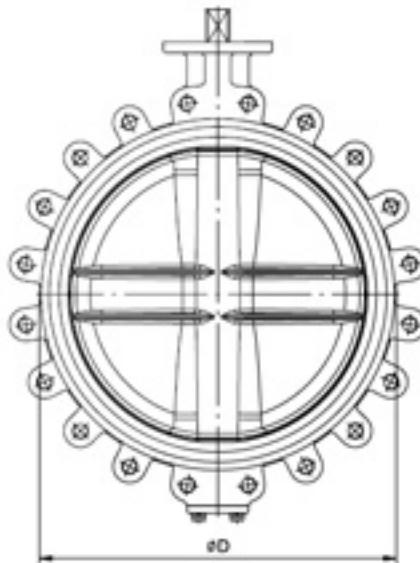

Size		Face to Face				Mounting flange (ISO 5211)		Flat shaft end			Disc clearance		Weight	
mm	inch		L	H1	H2	D	Type	PCD	ø B	B1	øB	C	C1	
40	1 1/2	1.30	2.36	4.72	3.19		F07	2.76	0.43	0.75	0.55	1.34	0.28	4.9
50	2	1.69	2.56	5.63	3.78		F07	2.76	0.43	0.75	0.55	1.54	0.31	7.5
65	2 1/2	1.81	2.80	6.10	4.33		F07	2.76	0.43	0.75	0.55	2.17	0.51	8.8
80	3	1.81	3.03	6.38	4.88		F07	2.76	0.43	0.75	0.55	2.72	0.75	9.9
100	4	2.05	3.50	7.13	5.83		F07	2.76	0.43	0.75	0.55	3.58	1.06	16.8
125	5	2.20	4.41	7.76	7.09		F07	2.76	0.55	0.75	0.75	4.53	1.42	20.9
150	6	2.20	4.84	8.27	8.11		F07	2.76	0.55	0.75	0.75	5.51	1.85	22.9
200	8	2.36	5.91	9.45	10.20		F10	4.02	0.67	0.94	0.87	7.32	2.68	38.6
250	10	2.68	7.05	11.26	12.60		F10	4.02	0.75	0.94	0.98	9.41	3.54	58.4
300	12	3.07	8.50	12.17	14.57		F10	4.02	0.87	0.94	1.18	11.34	4.37	95.9
350	14	3.07	11.87	12.95	16.22		F12	4.92	1.06	1.14	1.38	12.80	5.07	127.9
400	16	4.02	13.13	14.21	18.70		F12	4.92	1.26	1.14	1.65	14.76	5.63	178.6
450	18	4.49	14.11	15.47	20.87		F14	5.51	1.26	1.50	1.77	16.65	6.38	242.5
500	20	5.00	15.45	16.81	23.03		F14	5.51	1.42	1.50	1.97	18.62	7.17	341.7
600	24	6.06	17.89	19.37	27.05		F16	6.50	1.81	1.89	2.36	22.05	8.43	571.0

Accessories



Positioners



RPB Series Rack &
Pinion Actuator



Limit Switches and
Solenoids

Manual DeClutchable
Override



Ductile Iron and Stainless Steel
Handles and Gear Operators



EOM Series Electric Actuators
(With optional Local / Remote Pushbuttons)



www.bvcusa.com
www.bvcusa.com

Butterfly Valves & Controls Inc.

671 Industrial Blvd. Grapevine, Texas 76051
Phone: 817-421-5343
Facs: 817-416-6270
www.bvcusa.com