

REFER DIMENSIONS	TOLERANCE
0~400	±2
400~800	±3
800 ↑	±4



UNIT: □MPa □bar □PSI □Kg/cm ²
MAX WORKING PRESS
SHELL TEST
SEAT TEST
TEST FLUID
WEIGHT: 3.4 kg

FLANGE	PCD	K	FLANGE	PCD	K
PN10	125	M16	JIS 10K	120	M16
PN16	125	M16			

FLANGE	PCD	K
ASME B16.5 CLASS 150	120.7	5/8"-11UNC
BS10 Table E	114.3	5/8"-11UNC

MATERIAL TABLE(ASTM)			
BODY	DISC	SEAT	STEM
A536-65-45-12	A536-65-45-12 +NYLON 11	NBR	A182 F6A
	A351 CF8	EPDM	A182 F304
	A351 CF8M	CR	A182 F316
	B148 C95400		

9	BUSH	1	RPTFE+A240 304
8	BUSH	1	ASTM B62
7	O-RING	2	NBR
6	BUSH	1	DELIN
5	PIN	1	ASTM A182 F304
4	SEAT	1	SEE MATERIAL TABLE
3	STEM	1	
2	DISC	1	
1	BODY	1	
ITEM NO.	PART NAME	Q'TY	MATERIAL

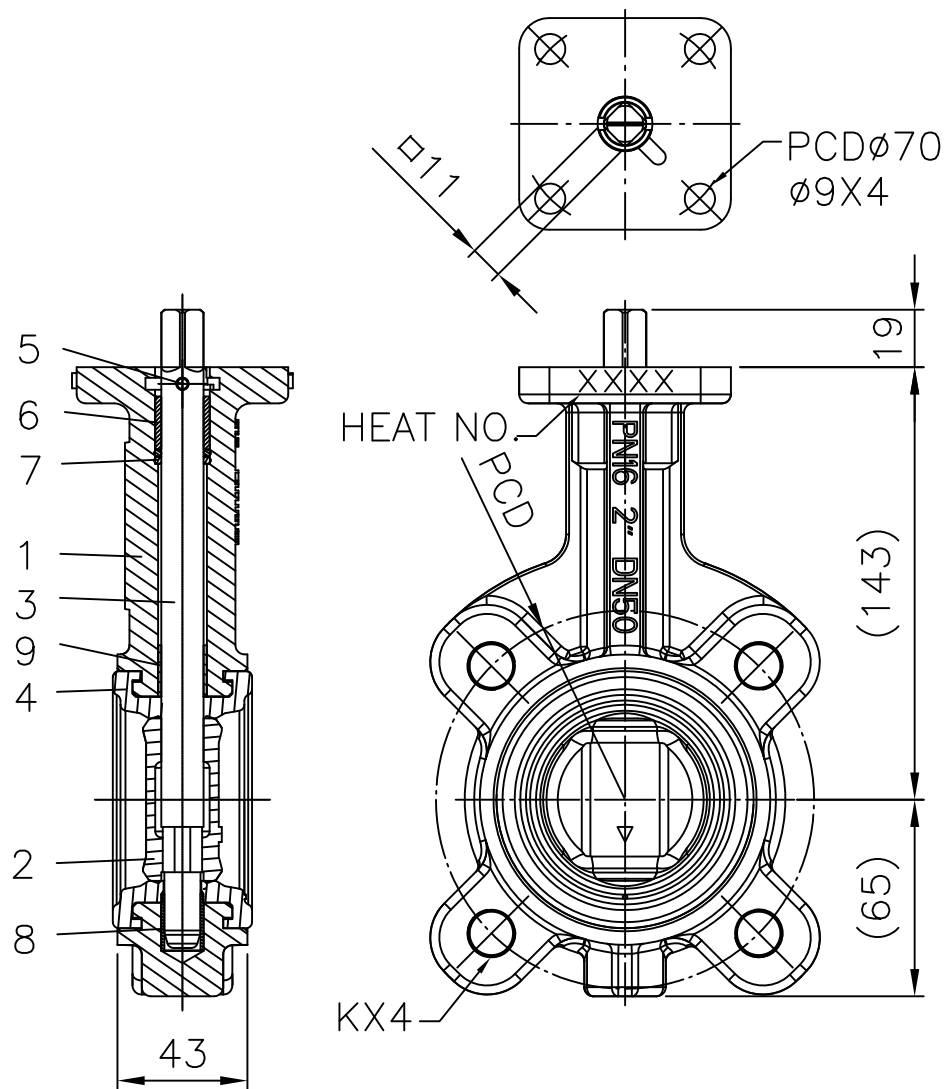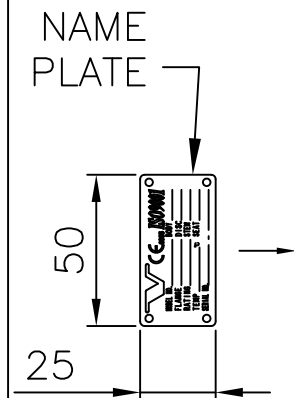

	VALUE VALVES CO., LTD. NO.9,CHUNG SHAN RD., TEL:+886-2-22698000 TU-CHENG INDUSTRIAL DISTRICT, FAX:+886-2-22686600 TAIPEI HSIEN,TAIWAN 236 www.valuevalves.com		DESN BY	CHK BY	AUTH BY	ISSUE DATE	2009.03.07	VF-733 BUTTERFLY VALVE ø50mm BARE SHAFT			
			POCKY 2009.03.07		GRANT 2009.03.07	MATERIAL					
						SCALE	1/2.5				
						UNIT	m/m	SIZE A4	DRAWING NO	S733005FN02	REV 1